


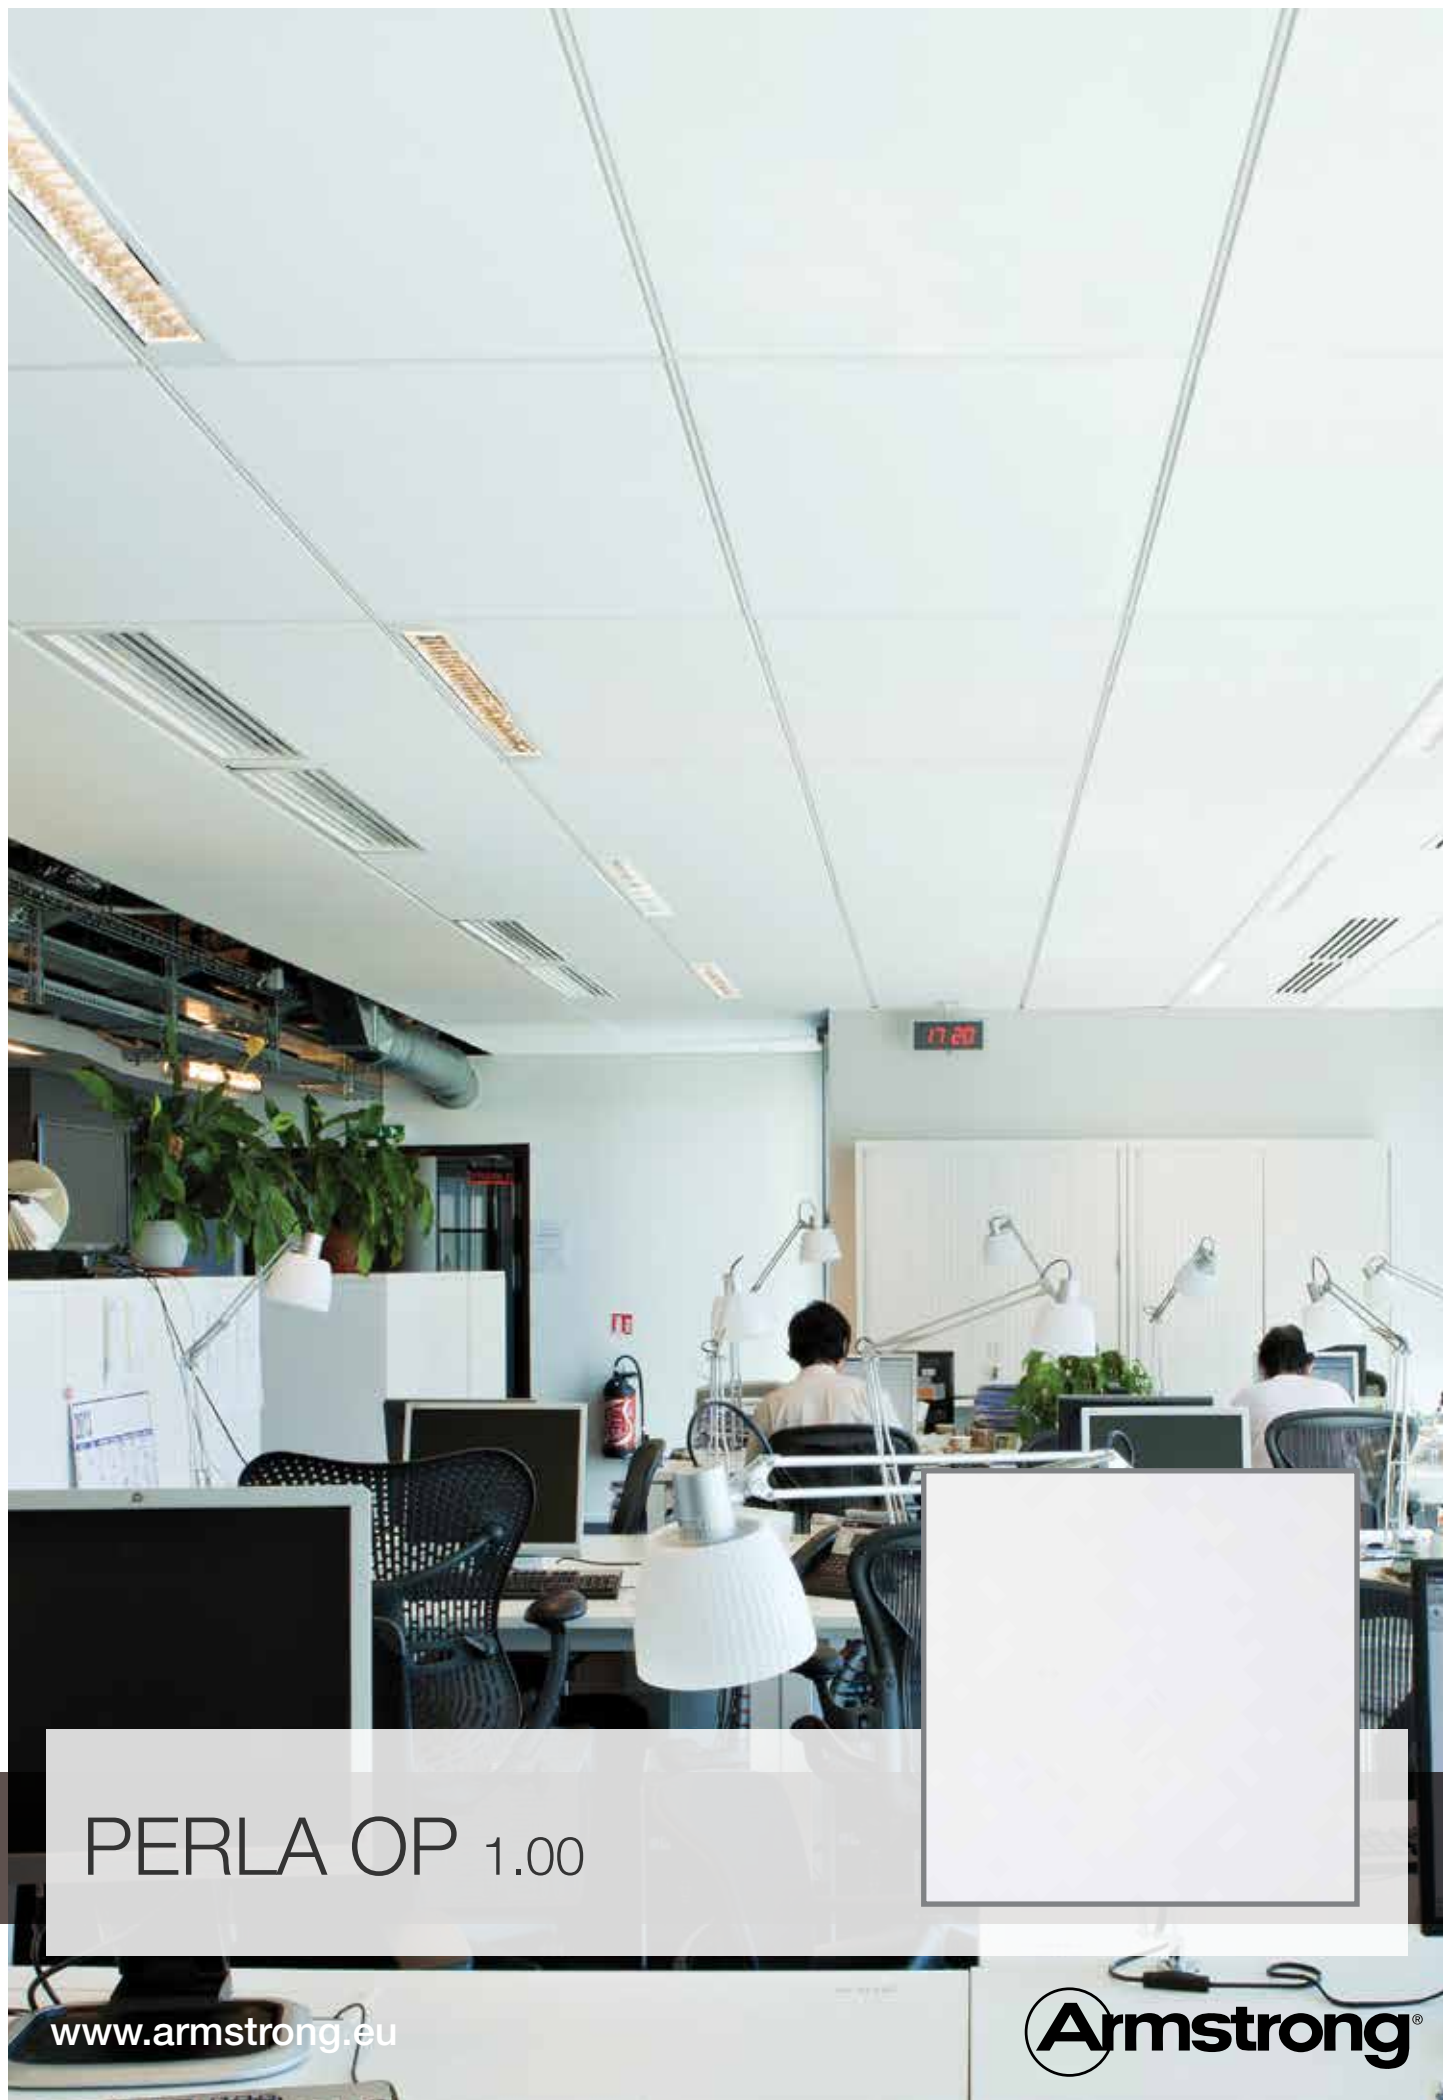

PERLA OP 1.00

www.armstrong.eu

Armstrong®

PERLA OP 1.00



33%
EN ISO
14021

Recycled Content





85%
EN ISO
7724-2 & 3

Light Reflectance



Concentration

PERLA OP 1.00


	BOARD	TEGULAR	MICROLOOK
	 Prelude XL ² /TLX 24 mm Prelude Sixty ²	 Prelude XL ² /TLX 24 mm Prelude Sixty ²	 Prelude XL ² /TL 15 mm Interlude XL ² 15 mm
			
600 x 600 x 20 mm	3861 M	3866 M	3869 M
675 x 675 x 20 mm	3862 M	3867 M	3870 M
600 x 1200 x 20 mm	3863 M		



EN ISO 354 &
EN ISO 11654

α_w	NRC	125	250	500	1000	2000	4000	Hz
1.00	0.95	0.50	0.85	0.95	0.95	1.00	1.00	α_p

Sound Absorption Class = A

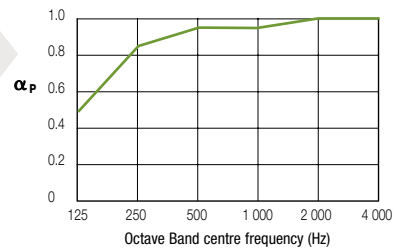

EN ISO 10848-2
& EN ISO 717-1

D_{nfw}
25 dB



EN ISO 140-3
& EN ISO 717-1

R_w
12 dB



EEA	Euroclass A2-s1, d0
EN 13501-1	

RUS	KM1 (G1, V1, D1, T1)
FZ 123	



EN 12667
& ISO 8301

$\lambda = 0.037 \text{ W/m K}$



ISO 14644-1

ISO 5



95 % RH



15 YEAR
guarantee



30 YEAR
system
guarantee



3.4 kg/m²