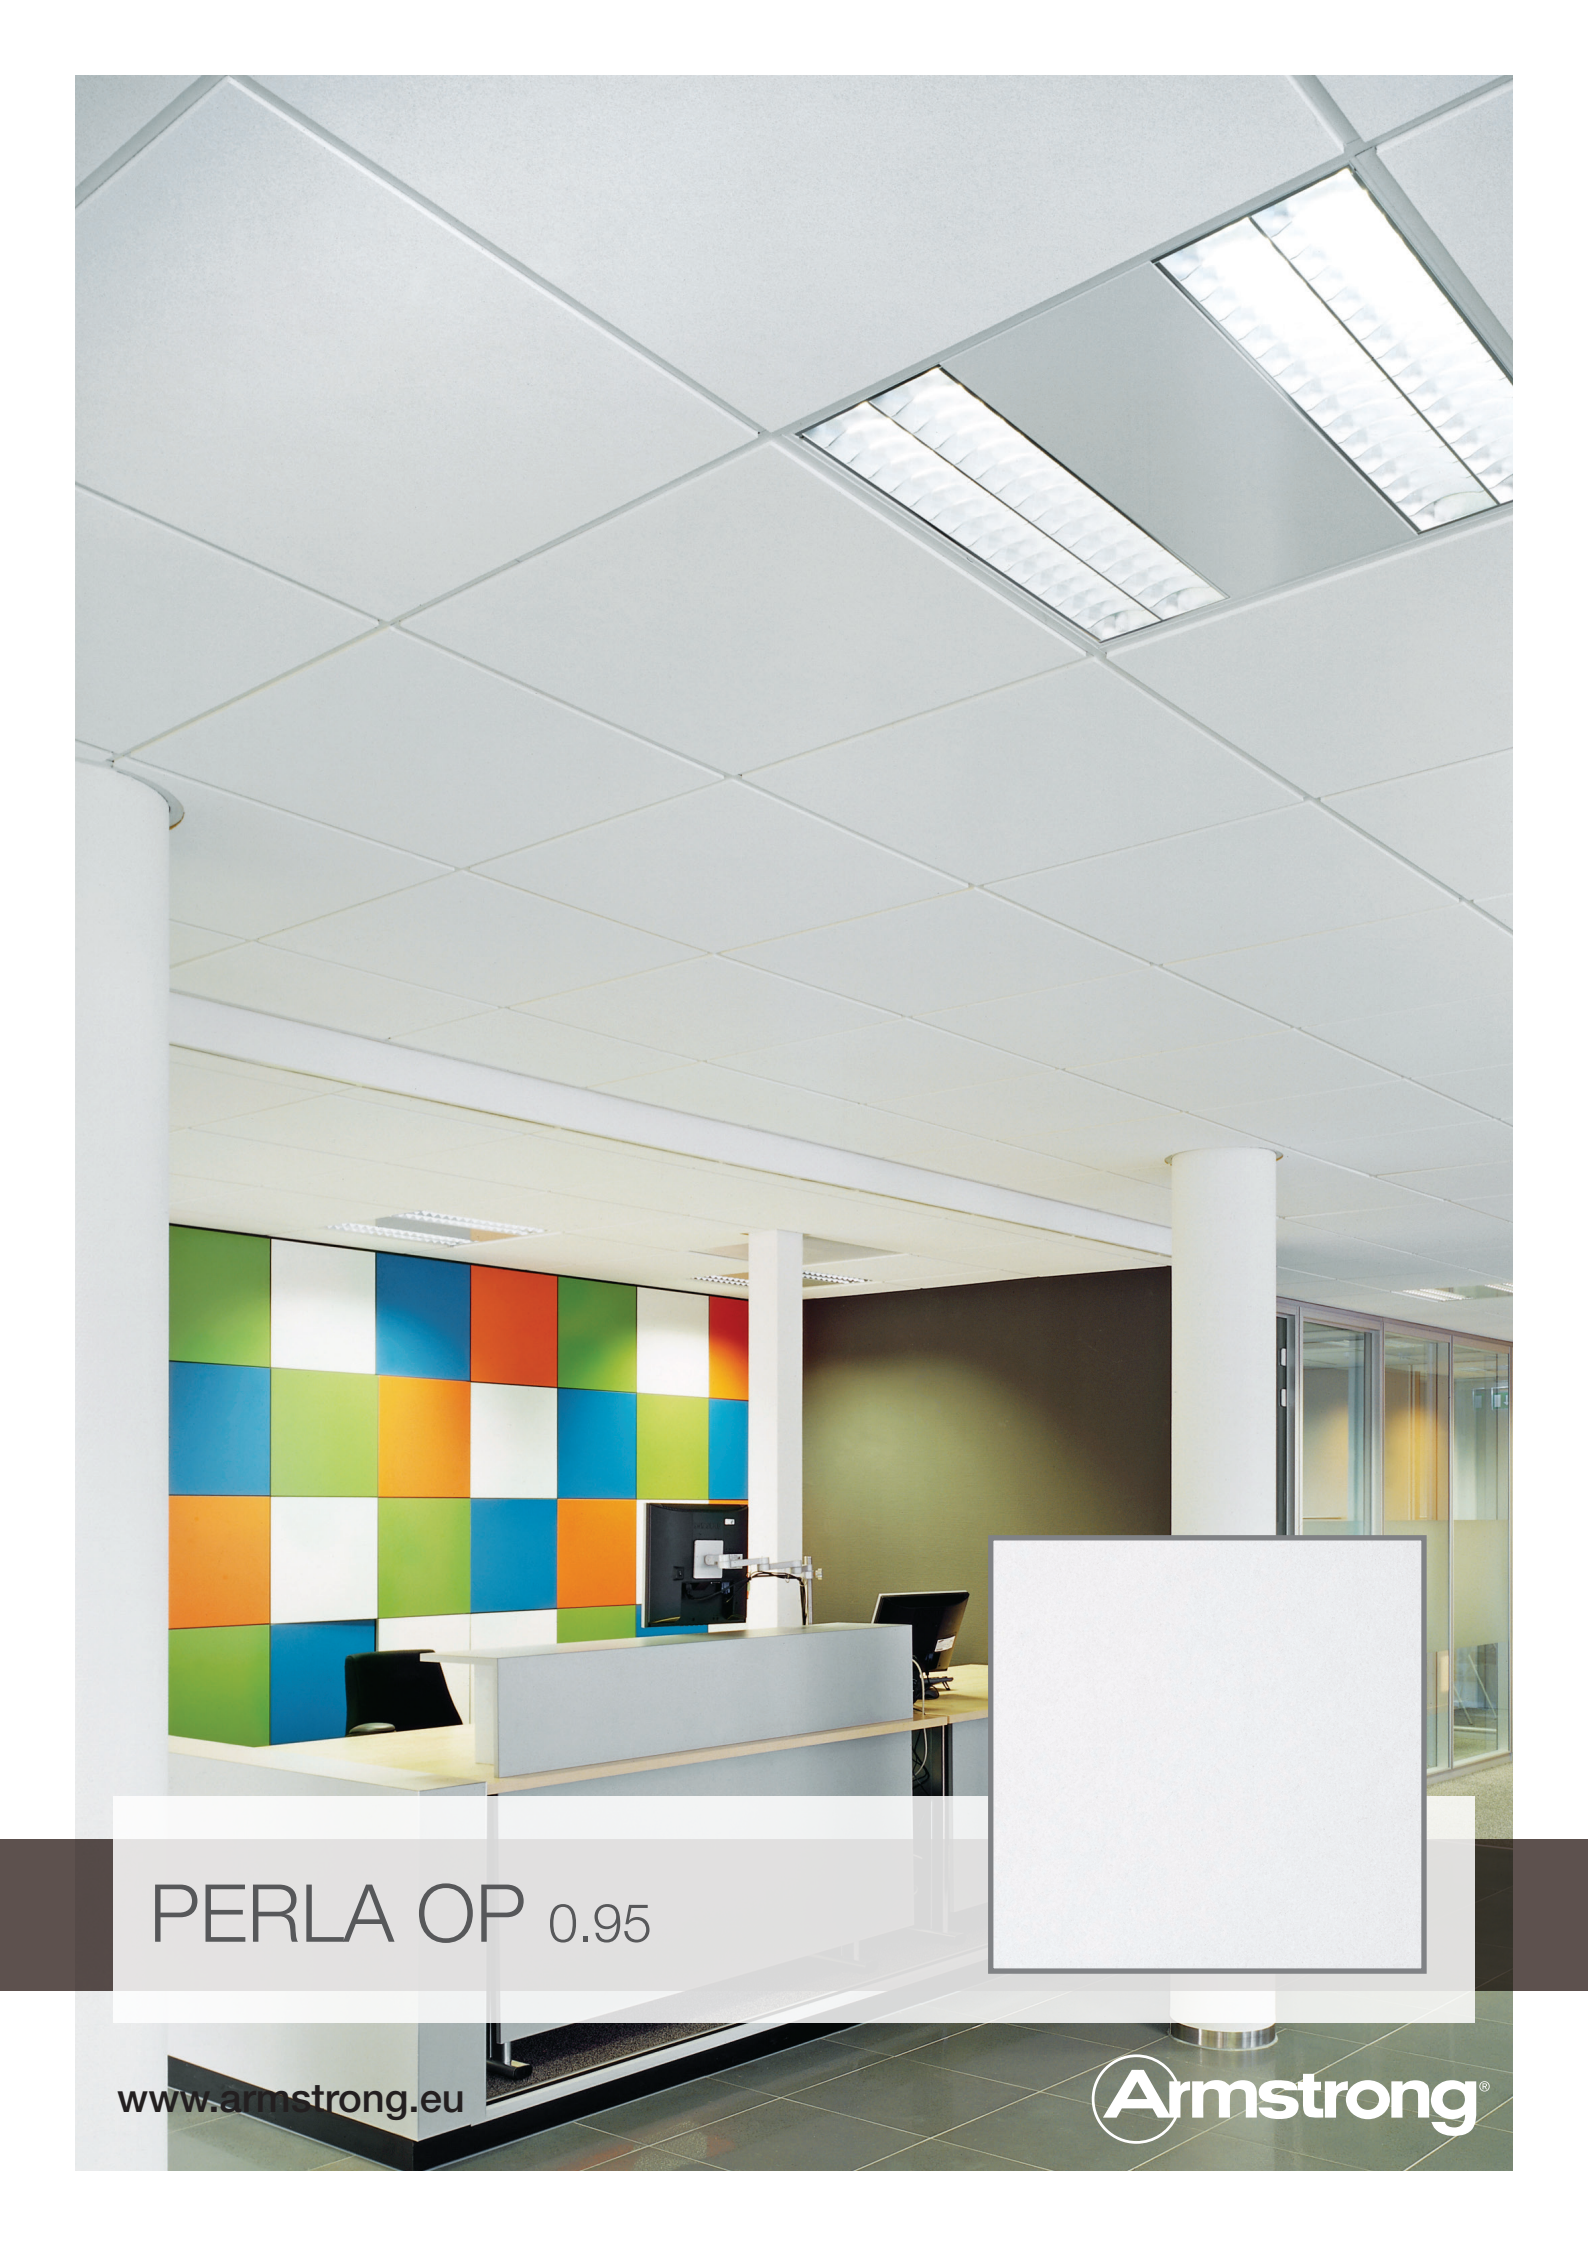


A modern office interior featuring a white grid ceiling with recessed fluorescent lights. In the background, a reception desk is visible with a wall made of colorful square panels in shades of green, blue, orange, and white. A large white pillar stands to the right of the desk. A glass-walled office area is visible in the far background. A large, square, white textured sample of the PERLA OP 0.95 ceiling tile is shown in the foreground, partially overlapping the desk and pillar.

PERLA OP 0.95

www.armstrong.eu

Armstrong®

PERLA OP 0.95



PERLA OP 0.95


	BOARD	TEGULAR	MICROLOOK	SL2
Tiles				
600 x 600 x 15 mm	3819 M	3824 M		
675 x 675 x 15 mm	3820 M*	3825 M*		
600 x 1200 x 15 mm	3821 M	3826 M	3829 M	
600 x 600 x 18 mm		2882 M	2883 M	
625 x 625 x 18 mm	2880 D	2882 D	2883 D	
675 x 675 x 18 mm			3828 M*	
600 x 1200 x 18 mm	2881 M			
Planks				
600 x 1500 x 18 mm	3092 M			
600 x 1800 x 18 mm	3093 M			
300 x 1500 x 18 mm				3094 M
300 x 1800 x 18 mm				3096 M

*This size is not available in all markets, please contact us for product range information.



EN ISO 354 &
EN ISO 11654

α_w	NRC	125	250	500	1000	2000	4000	Hz
• Tiles 15 mm								
0.95	0.90	0.45	0.80	0.95	0.90	1.00	1.00	α_p
• Tiles, Board Planks 18 mm								
0.95	0.90	0.50	0.85	0.95	0.90	1.00	1.00	α_p
• SL2 Planks								
0.95	0.90	0.45	0.85	0.95	0.90	0.95	1.00	α_p
Sound Absorption Class = A								

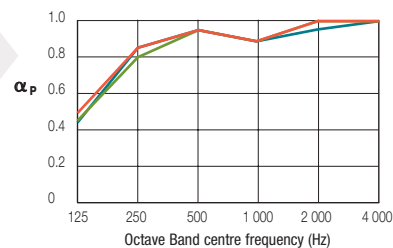

EN ISO 10848-2
& EN ISO 717-1

D_{nfw}
27 dB (SL2 Planks)
25 dB (Tiles, Board Planks)



EN ISO 140-3
& EN ISO 717-1

R_w
12 dB (Tiles 15 mm)
10 dB (Tiles 18 mm)



EEA	Euroclass A2-s1,d0
EN 13501-1	

RUS	KM1 (G1, V1, D1, T1)
FZ 123	



EN 12667
& ISO 8301

$\lambda = 0.036 \text{ W/m K}$



ISO 14644-1

ISO 5



95 % RH



$\approx 3.3 \text{ kg/m}^2$

Please contact the Armstrong Technical Sales group for further details.

www.armstrong.eu